

OVERVIEW

The SM8141 is a transformer-less electroluminescent (EL) sheet lamp driver, capable of driving sheets up to 50cm² in size. It employs built-in high withstand voltage output MOS transistors and requires few external components, making it ideal for compact driver units in portable equipment.

FEATURES



- Dedicated EL driver
- 50cm² maximum EL sheet drive capability
- Noise-less smooth drive waveform
- Two oscillators (EL and coil)(SM8141A)
- Stand-by function (SM8141B)
- High-efficiency MOS transistor driver
- Dual supply operation possible
(See TYPICAL APPLICATIONS)
- 2.0 to 5.5V supply operation
- 200Vp-p maximum drive voltage
- 250Hz standard drive frequency
- 8-pin VSOP package
- Chip form

ORDERING INFORMATION

Device	Package
SM8141AV	8pin VSOP
SM8141BV	
CF8141A	Chip form
CF8141B	


PINOUT

(Top view)

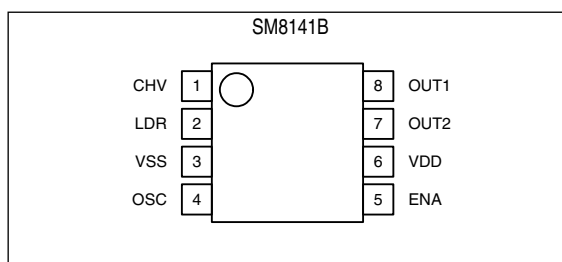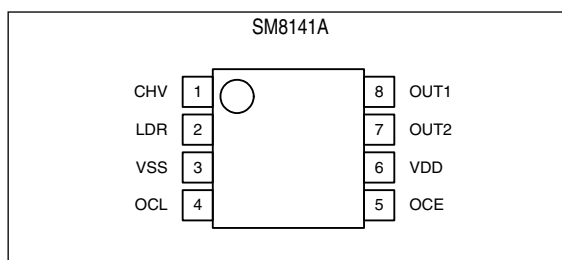


PACKAGE DIMENSIONS

(Unit: mm)

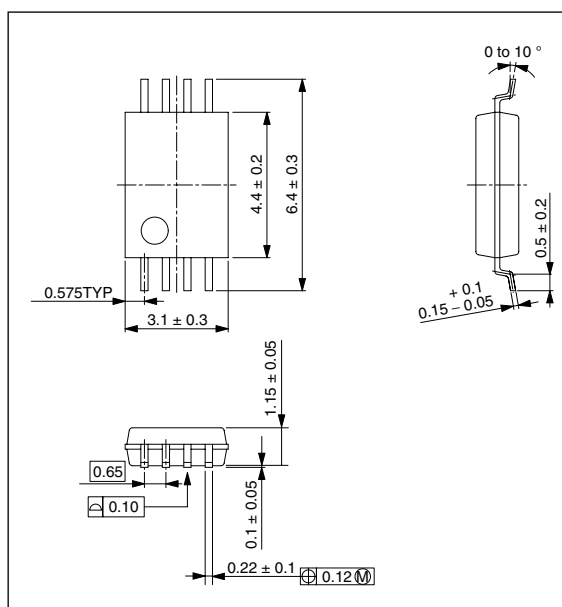

PAD DIMENSIONS

(Unit: mm)

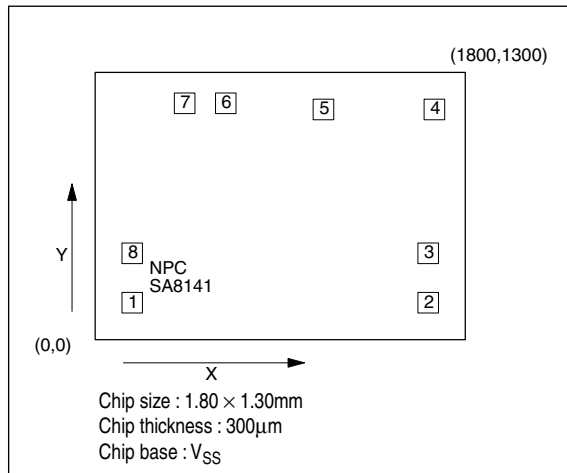

PIN DESCRIPTION

• SM8141A


Pin number	Pad number	Name	Pad dimensions		I/O	Function
			X [µm]	Y [µm]		
1	6	CHV	635	1150	I	High-voltage DC input
2	7	LDR	435	1150	O	Booster coil driver output
3	8	VSS	180	420	–	Ground
4	1	OCL	180	180	I	Coil driver oscillator (oscillator frequency determined by external variable resistor)
5	2	OCE	1620	180	I	EL driver oscillator (oscillator frequency determined by external variable resistor)
6	3	VDD	1620	420	–	Supply
7	4	OUT2	1650	1120	O	Output 2
8	5	OUT1	1110	1120	O	Output 1

• SM8141B


Pin number	Pad number	Name	Pad dimensions		I/O	Function
			X [µm]	Y [µm]		
1	6	CHV	635	1150	I	High-voltage DC input
2	7	LDR	435	1150	O	Booster coil driver output
3	8	VSS	180	420	–	Ground
4	1	OSC	180	180	I	Coil and EL driver oscillator (oscillator frequency determined by external variable resistor)
5	2	ENA	1620	180	I	Enable input (built-in pull-down resistor)
6	3	VDD	1620	420	–	Supply
7	4	OUT2	1650	1120	O	Output 2
8	5	OUT1	1110	1120	O	Output 1

BLOCK DIAGRAM

- SM8141A

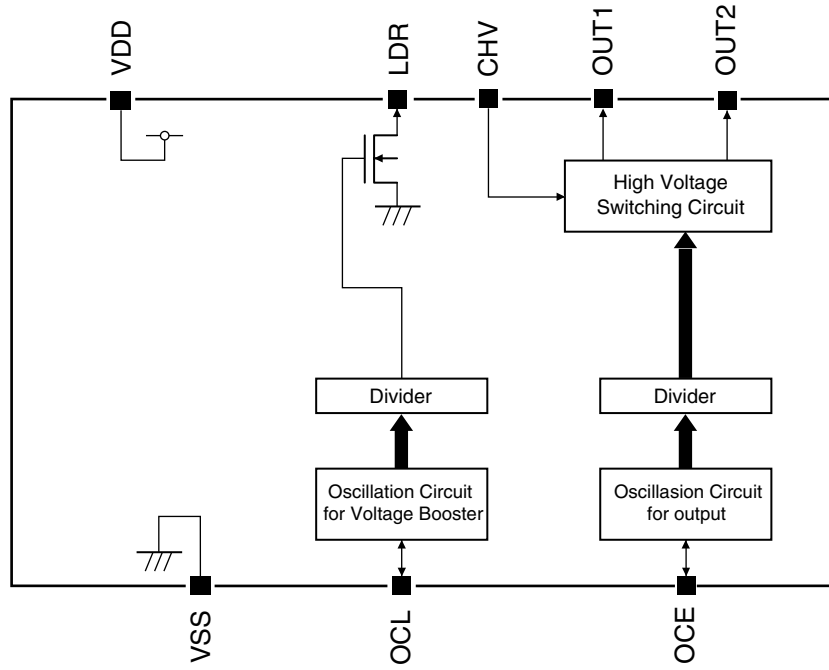

- SM8141B

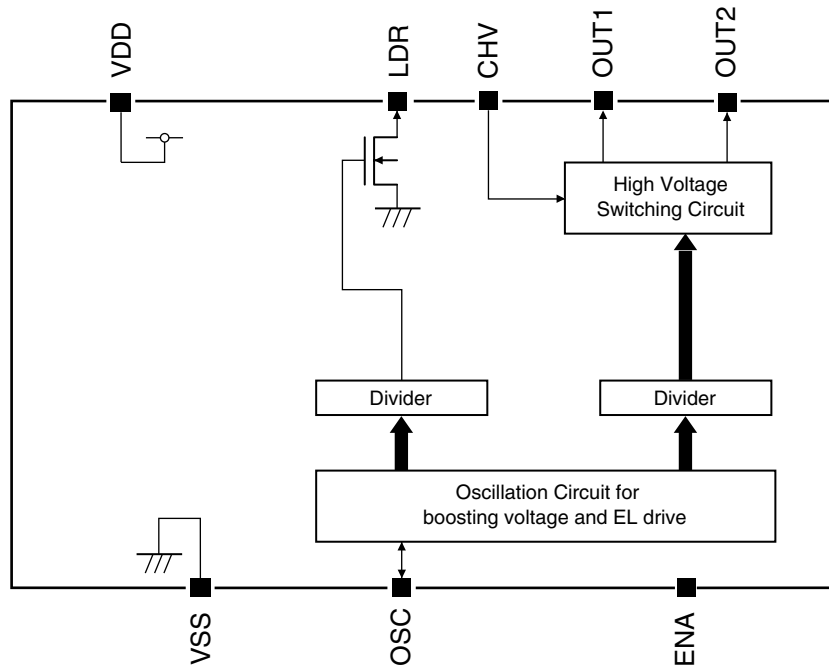

SPECIFICATIONS

Absolute Maximum Ratings

$$V_{SS} = 0V$$

Parameter	Symbol	Condition	Rating	Unit
Supply voltage range	V_{DD}		- 0.3 to 7.0	V
Input voltage range	V_{IN}	All Input pins	$V_{SS} - 0.3$ to $V_{DD} + 0.3$	V
Output voltage	V_{CHV}	CHV pin	0.5 to 120	V
	V_{LDR}	LDR pin	0.5 to 120	V
	$V_{OUT1/2}$	OUT1 , OUT2 pin	0.5 to 120	V
Storage temperature range	T_{STG}		- 55 to 125	°C
Power dissipation	P_D	$T_a \leq 85^\circ C$	100	mW

Recommended Operating Conditions

$$V_{SS} = 0V$$

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
Supply voltage	V_{DD}		2.0	3.0	5.5	V
Operating temperature	T_{OPR}		- 40	-	85	°C
Operating current ¹	I_{DD2}	Including coil current, $V_{DD} = 3.0V$	-	-	60	mA
		Including coil current, $V_{DD} = 5.0V$	-	-	36	
Coil inductance	L_{LDR2}	$f_{LDR} = 64kHz$	-	0.47	-	mH


1. Max value is as same as Absolute Maximum Ratings.

DC Characteristics

Ta = 25°C, V_{SS} = 0V, V_{DD} = 3.0V unless otherwise noted




Parameter	Ver.	Symbol	Condition	Rating			Unit
				min	typ	max	
Supply voltage	A/B	V _{DD}		2.0	3.0	5.5	V
CHV output voltage	A/B	V _{CHV}		0.5	–	100	V
OUT1, OUT2 HIGH-level output voltage	A/B	V _{OUTH}		–	–	100	V
OUT1, OUT2 LOW-level output voltage	A/B	V _{OUTL}		–	–	0.5	V
LDR output resistance	A/B	R _{LDR}	I _{LDR} = 50mA	–	8.0	12.0	Ω
OCE oscillator frequency	A	f _{OCE1}	R _{OCE} = 200kΩ	205	256	307	kHz
OCE oscillator frequency range		f _{OCE2}		32	–	1024	
OCL oscillator frequency	A	f _{OCL1}	R _{OCL} = 200kΩ	205	256	307	kHz
OCL oscillator frequency range		f _{OCL2}		32	–	1024	
OSC oscillator frequency	B	f _{OSC1}	R _{OSC} = 200kΩ	205	256	307	kHz
OSC oscillator frequency range		f _{OSC2}		32	–	1024	
OUT1, OUT2 output frequency	A/B	f _{OUT1}	R _{OCE} /R _{OSC} = 200kΩ	200	250	300	Hz
OUT1, OUT2 output frequency range		f _{OUT2}		31	–	1000	
LDR inductance driver frequency	A/B	f _{LDR1}	R _{OCL} /R _{OSC} = 200kΩ	51	64	77	kHz
LDR inductance driver frequency range		f _{LDR2}		8	–	256	
ENA HIGH-level input voltage	B	V _{ENAH}	ENA = "H", V _{DD} = 2.0 to 5.5V	V _{DD} – 0.5	–	V _{DD} + 0.3	V
ENA LOW-level input voltage		V _{ENAL}	ENA = "L", V _{DD} = 2.0 to 5.5V	V _{SS} – 0.3	–	V _{SS} + 0.5	
ENA input current	B	I _{ENAH}	V _{ENAH} = 3.0V, V _{DD} = 3.0V	2.0	4.0	6.0	μA
Operating current	A/B	I _{DD1}	Excluding coil current	–	–	1	mA
Stand-by current	B	I _{STB}	ENA = "L"	–	–	1	μA
ENA rise time ¹	B	t _{ENA}	V _{ENAL} → V _{ENAH}	–	–	100	ms

1.

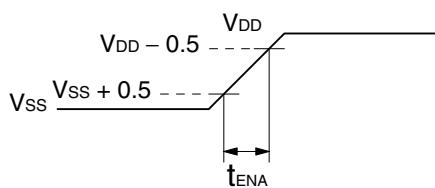

TYPICAL APPLICATIONS




• SM8141A

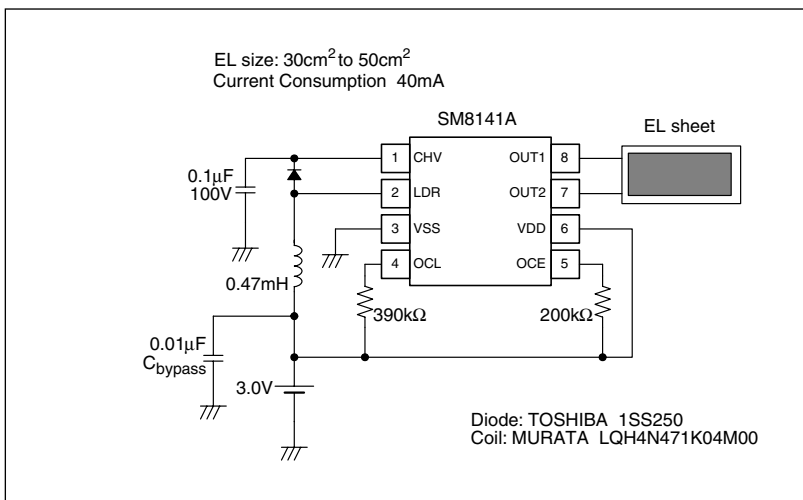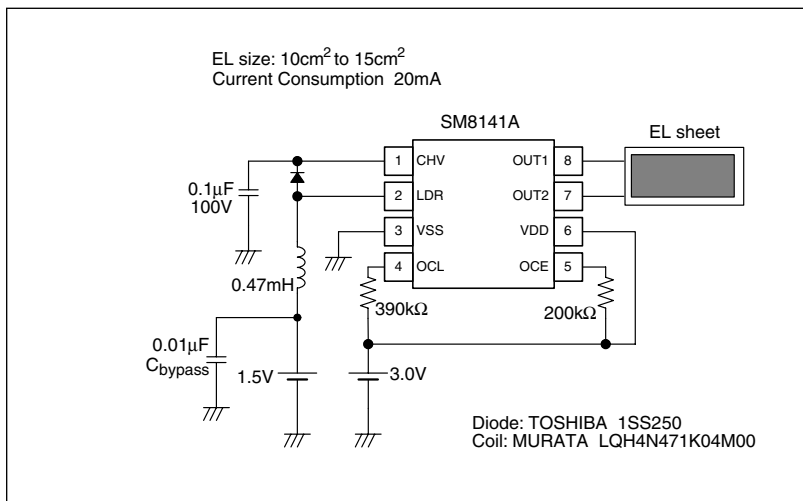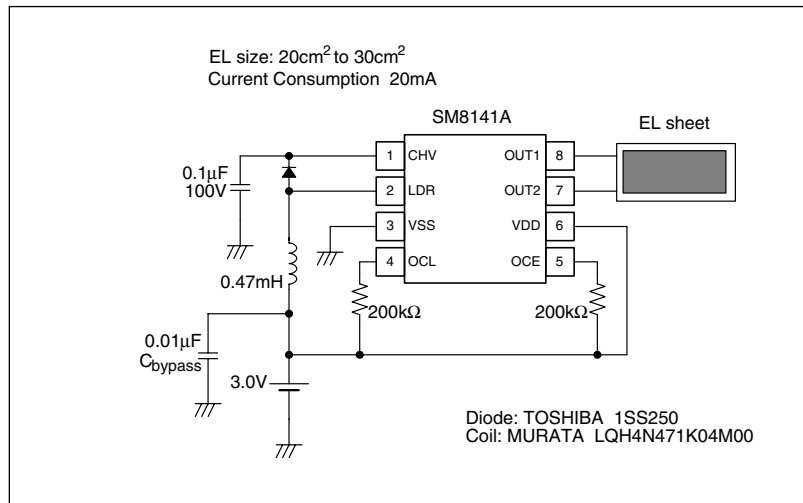

Note) Do not operate the SM8141 with the EL sheet NOT connected (no load to OUT1/OUT2) since the IC will be damaged.

SM8141

• SM8141B

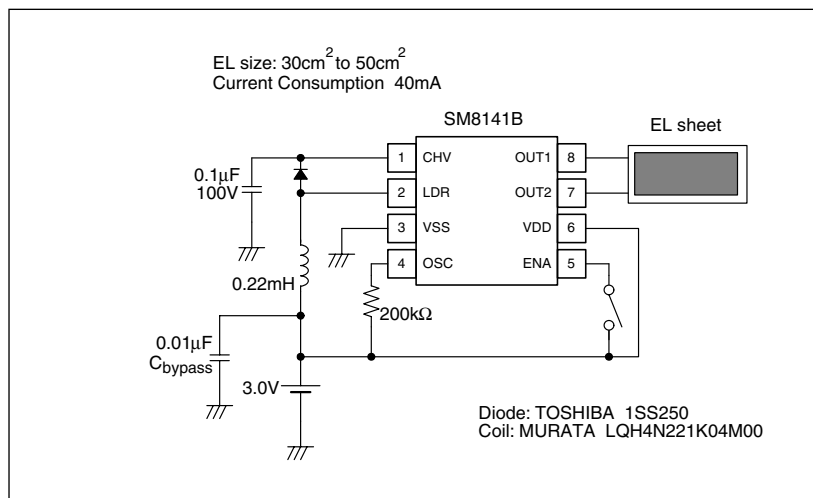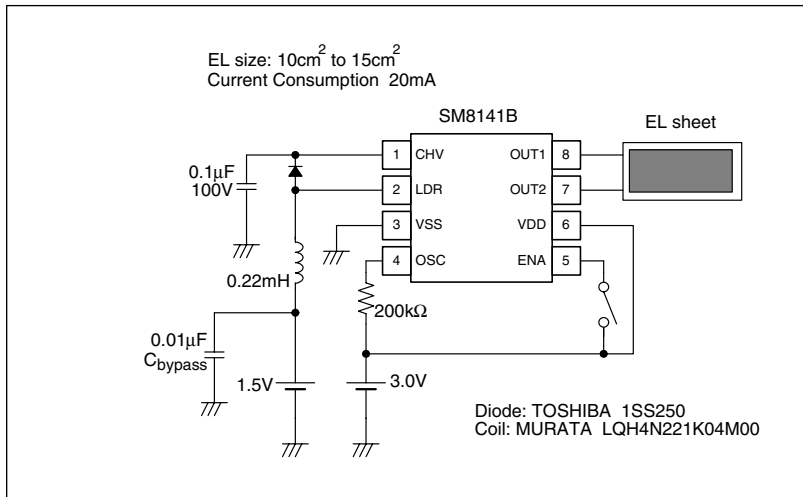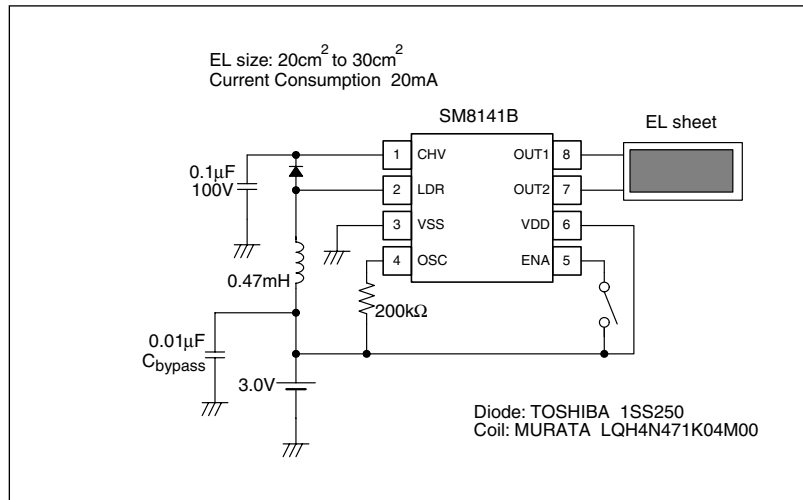

Note) Do not operate the SM8141 with the EL sheet NOT connected (no load to OUT1/OUT2) since the IC will be damaged.

Please pay your attention to the following points at time of using the products shown in this document.

The products shown in this document (hereinafter "Products") are not intended to be used for the apparatus that exerts harmful influence on human lives due to the defects, failure or malfunction of the Products. Customers are requested to obtain prior written agreement for such use from SEIKO NPC CORPORATION (hereinafter "NPC"). Customers shall be solely responsible for, and indemnify and hold NPC free and harmless from, any and all claims, damages, losses, expenses or lawsuits, due to such use without such agreement. NPC reserves the right to change the specifications of the Products in order to improve the characteristic or reliability thereof. NPC makes no claim or warranty that the contents described in this document dose not infringe any intellectual property right or other similar right owned by third parties. Therefore, NPC shall not be responsible for such problems, even if the use is in accordance with the descriptions provided in this document. Any descriptions including applications, circuits, and the parameters of the Products in this document are for reference to use the Products, and shall not be guaranteed free from defect, inapplicability to the design for the mass-production products without further testing or modification. Customers are requested not to export or re-export, directly or indirectly, the Products to any country or any entity not in compliance with or in violation of the national export administration laws, treaties, orders and regulations. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.

The logo for SEIKO NPC CORPORATION, consisting of the letters 'NPC' in a bold, black, sans-serif font.

SEIKO NPC CORPORATION

15-6, Nihombashi-kabutocho, Chuo-ku,
Tokyo 103-0026, Japan
Telephone: +81-3-6667-6601
Facsimile: +81-3-6667-6611
<http://www.npc.co.jp/>
Email: sales@npc.co.jp

NC9710FE 2006.08